

ED型功率铁氧体产品系列

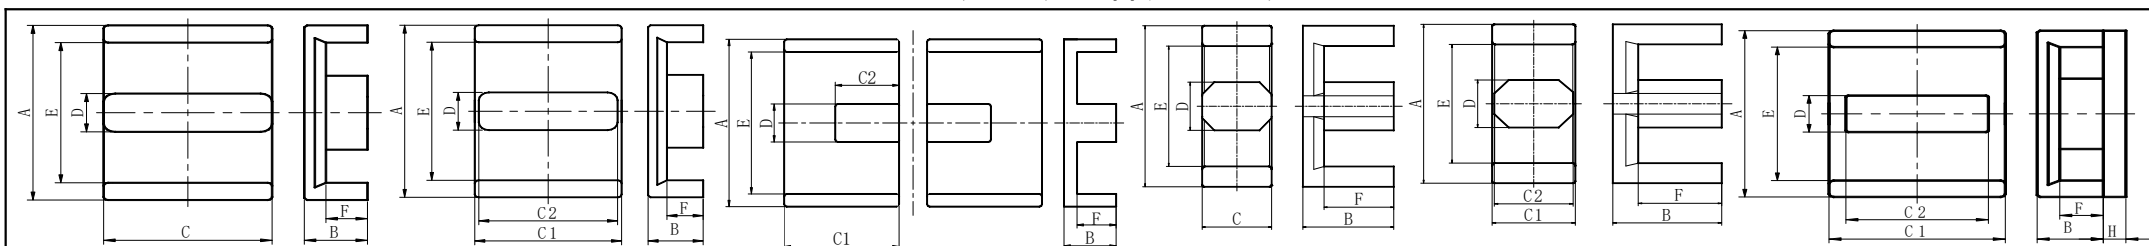


Fig.1

Fig.2

Fig.3

Fig.4

Fig.5

Fig.6

规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter			电感系数AL(nH/N ²)		重量(克/付) Wt(g/set)
		A	B	C/C1	C2	D	E	F/H	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP44	BP95	
ED22/23	5	22.0±0.40	11.6±0.2	9.0±0.20	8.60±0.20	6.55±0.2	16.4±0.4	8.80±0.2	50.20	53.40	2679.00	1900±25%	2350±25%	15.10
ED23/25	1	23.0±0.30	7.6±0.2	25.0±0.30	-	5.0±0.20	17.50min	5.0±0.15	127.40	40.80	5197.90	6600±25%	8250±25%	31.10
ED25/34	1	25.5±0.30	7.6±0.2	34.0±0.30	-	5.0±0.20	20.00min	5.0±0.15	173.60	43.40	7686.20	8300±25%	10500±25%	45.00
ED26/30	2	26.0+0/-0.6	6.75±0.2	30.1±0.35	29.1±0.36	5.15±0.2	21.0+0/-0.6	4.25±0.20	151.20	40.50	6123.60	7500±25%	9500±25%	35.30
ED26/30-1	4	26.0±0.4	14.75±0.2	11.5±0.20	-	7.80±0.15	19.00min	11.35±0.2	79.50	71.69	5700.00	2750±25%	3400±25%	29.70
ED26/25.3-2	2	26.0+0/-0.7	8.8±0.2	25.0+0.7/-0	24+0.7/-0	6.50±0.2	19.8+0/-0.6	5.70±0.20	155.40	45.80	7117.32	6800±25%	8200±25%	41.00
ED26/15.3-4	2	25.8±0.35	8.4±0.2	15.3±0.30	14.0±0.20	7.50±0.2	18.55min	5.00±0.20	104.67	42.76	4475.69	5400±25%	6500±25%	26.60
ED64/90	3	64.4±1.20	10.2±0.5	45.0±0.85	25.0±0.60	15±1	56±1.2	5.1±0.50	819.00	78.59	64366.4	17500±25%	20500±25%	433.00
EDI17/9.0	6	17.6±0.40	6.8±0.2	12.50±0.20	10.0±0.20	5±0.2	13.6±0.4	F:4.60±0.2 H:2.20±0.1	52.30	25.50	1333.65	3800±25%	4600±25%	8.2

注: AL值测试条件:1KHz、0.3V、100Ts。(Remark:Testing conditon for AL:1KHz、0.3V、100Ts.)

以上为本公司标准规格, 可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)